PYRAMEX
THE PEAK OF SAFETY AND STYLE

PMXCEL

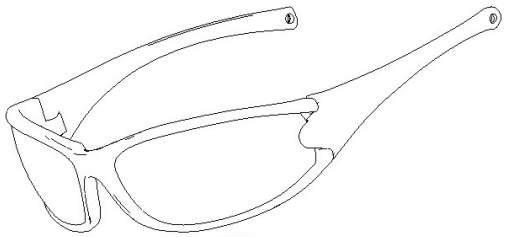

SPECIAL FEATURES:
- Inner foam padding is fire retardant and provides excellent sealed protection from wind, dust and other debris.
- Durable frame features straight temples with detachable cord.
- Anti-fog lenses provide 99% protection against harmful UV rays.
- Polarized lens option provides crisp, distortion-free optical clarity.
- Meets ANSI Z87.1+ High Impact Requirements; CE EN 166 Certified.

GENERAL SPECIFICATIONS

Lens Thickness:	2.0mm	PD:	64 mm
Lens Base:	8.0 curve	Weight:	32 gm
Lens size vertical:	39.0mm	Lens Size Diagonal:	72 mm
Bridge:	18.0mm	Temple length:	119mm

Overall Width (hinge-hinge):	140.0mm
Closest point between lenses:	18.0mm
Closest point between temple tips:	97.0mm

FRAME AND LENS OPTIONS:
Frame colors: Matte Black, Shiny Black
Lens options: Clear Anti-fog, Gray Anti-fog, PC Polarized Gray Anti-fog

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	Full eye protection 8.0 curve lens
Frame	Polycarbonate	Dual lens frame w/ side protection
Side Shield	N/A	N/A
Foam	RB	Fire retardant
Temple	Polycarbonate	Spatula with cord attaching hole
Cord	Tairylan Acrylic Fiber	Fire retardant
Hinge	Polycarbonate	Integral to frame/temple
Screw	Stainless Steel standard hinge screw	

MARKINGS:
Lens: As per standard
Frame: As per standard

PACKAGING:
1 pc in a polybag; 12 pcs in an inner box; 300 pcs in a carton

STANDARDS:
MEETS ANSI Z87.1 STANDARDS AND CE EN 166 CERTIFIED
TEST RESULTS AVAILABLE UPON REQUEST