



**NEW!**

# Miller AirCore™ Harness

## with Aluminum Hardware

• **Corrosion-Resistant**

• **Lightweight**

The new Miller AirCore™ Harness is now available with lightweight, corrosion-resistant aluminum hardware. This new line of AirCore harnesses with aluminum components provides the ultimate in performance and comfort.

### Features/Benefits:

#### Lightweight

- Aluminum materials and components selected to reduce fatigue for all-day endurance and increased productivity.
  - 16% lighter in weight than competitive harnesses with aluminum hardware
  - 20% lighter than harnesses with steel hardware

#### Extended Service Life

- Corrosion-resistant aluminum hardware
  - lasts longer, reducing replacement costs

*Research has found that a comfortable harness is more likely to be worn properly, increasing compliance, safety, and productivity.*



### COMFORT • EASY ADJUSTABILITY • STYLISH DESIGN

In addition, ALL Miller AirCore Harnesses are the most unique and innovative full-body harness available and are designed for;

**COMFORT** – breathable, open-core padding technology provides optimal air flow, while reducing heat and moisture entrapment, keeping a worker drier and cooler. **Up to 16% less surface area than other padding used on the market.** AirCore harnesses are designed with patented Miller DuraFlex® stretchable webbing that provides greater flexibility and increased comfort.

Optimal Air Circulation



Maximum Heat Ventilation



**EASY ADJUSTABILITY** – unique cam buckles on the shoulder straps make vertical webbing adjustment the easiest of any harness on the market. Quick-connect chest buckles for easy donning.

**STYLE** – new webbing design creates an original and vibrant style and color for easy identification and greater visibility.


## Miller AirCore™ Harnesses with Aluminum Hardware

Model Number	Size	Back D-Rings	Side D-Rings	Chest Strap	Leg Strap	Lumbar Pad	Removable Belt	*Weight
ACA-TB/UGN	Universal (L/XL)	Yes	No	Quick-Connect	Tongue	No	No	3.6 lbs. (1.63 kg)
ACA-QC/UGN		Yes	No		Quick-Connect	No	No	3.6 lbs. (1.63 kg)
ACA-TB-D/UGN		Yes	Yes		Tongue	No	No	4.0 lbs. (1.81 kg)
ACA-QC-D/UGN		Yes	Yes		Quick-Connect	No	No	4.0 lbs. (1.81 kg)
ACA-TB-BDP/UGN		Yes	Yes		Tongue	Yes	Yes	5.4 lbs. (2.45 kg)
ACA-QC-BDP/UGN		Yes	Yes		Quick-Connect	Yes	Yes	5.4 lbs. (2.45 kg)

\*Model numbers listed are for universal size. Harnesses are also available in small/medium and XXlarge by replacing the “/U” in the model number with “/S/M” or “/2/3XL”. To order a blue harness, simply replace the “GN” in the model number with “BL” (ex. AC-QC/UBL). All listed models include a back D-ring and sub-pelvic strap.

Miller AirCore Harnesses with Aluminum Hardware meet applicable OSHA 1926.502, ANSI A10.32, ANSI Z359.1 and CSA Z259.10-12 requirements.

***Rated to 400 lbs. (181.4 kg) capacity.***

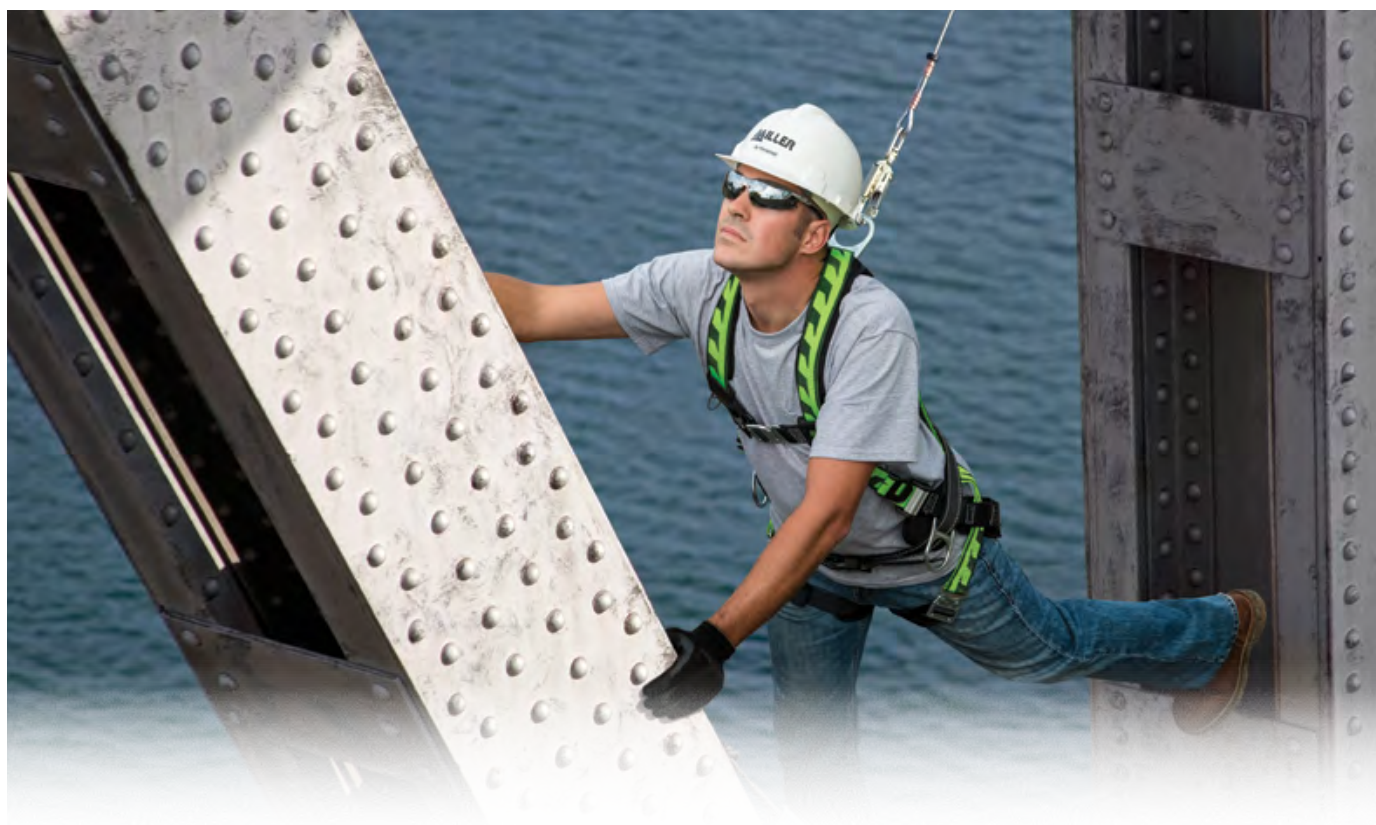

**Lead them to safety** – build an enduring Culture of Safety where employees make safe choices on their own.

[www.honeywellsafety.com/culture](http://www.honeywellsafety.com/culture)

©2014 Honeywell International Inc. All rights reserved.

⚠ This equipment should only be used after reading the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.



by Honeywell

► **Ask the Expert ... Ask Miller.**

**800/873-5242: Honeywell Technical Service**

**800/430-5490: Honeywell Customer Care**

[www.millerfallprotection.com](http://www.millerfallprotection.com)

**GET CONNECTED:**



LMACA/0413

**Honeywell**