

FEATURES & BENEFITS

SAFETY

8" x 10-3/4" (20.3 x 27.3 cm) universal emergency sign make the unit easily detected in an emergency. Test card to record weekly checks helps maintain the unit best working quality.

VALVE

Units swing forward to activate design produces a full continuous flow of water and provides an easy start to the irrigation process.

MOUNTING

Unit mounts on either side of the sink allowing for a secure fit in any location.

EYE/FACE WASH

AXION MSR™ eye/face wash head (patent pending) uses an inverted directional laminar flow to sweep contaminants away from the vulnerable nasal cavity.

OPTIONS

- ❑ Tempered Water Blending Systems: Model TWBS.EWE Lead-free AXION® Emergency Tempering Valve thermostatically mixes hot and cold water to provide a safe fluid supply for emergency eyewash equipment, with a flow rate of 12 gpm (45.4 L).
- ❑ Alarm: Model 9001.5, 1/2" 120 VAC emergency alarm and light system. Buzzer and flashing light are activated by a 1/2" IPS double pole, double throw flow switch.
- ❑ Test This Week Tag: SP170 is a green waterproof test card with space for date and initials of inspector. Used to record weekly testing of emergency equipment.
- ❑ Tempered Water Blending Valves: Model 9201EFE AXION® Emergency Tempering Valve thermostatically mixes hot and cold water to provide a safe fluid supply for a single emergency eye/face wash, with a flow rate of 12 gpm (45.4 L).

To see all options for this model, visit www.hawscow.com




SPECIFICATIONS

Model 7611 countertop mounted eye/face wash shall include an AXION MSR™ eye/face wash head shall feature inverted directional laminar flow which achieves zero vertical velocity supplied by an integral flow control, polished chrome-plated brass single action swing-out valve body, universal sign, and 1/2" O.D. (1.3 cm) slip joint inlet.

APPLICATIONS

Where safety is of the utmost importance and the eyes of any person may be exposed to injurious or corrosive materials, suitable facilities for quick flushing and cleansing of the eyes be provided within the work area for immediate emergency use. When installed properly, the stable construction, counter top design of the 7611 is space efficient and durable.


Model is certified by CSA to meet the ANSI Z358.1 Standard for Emergency Eyewash and Shower Equipment.

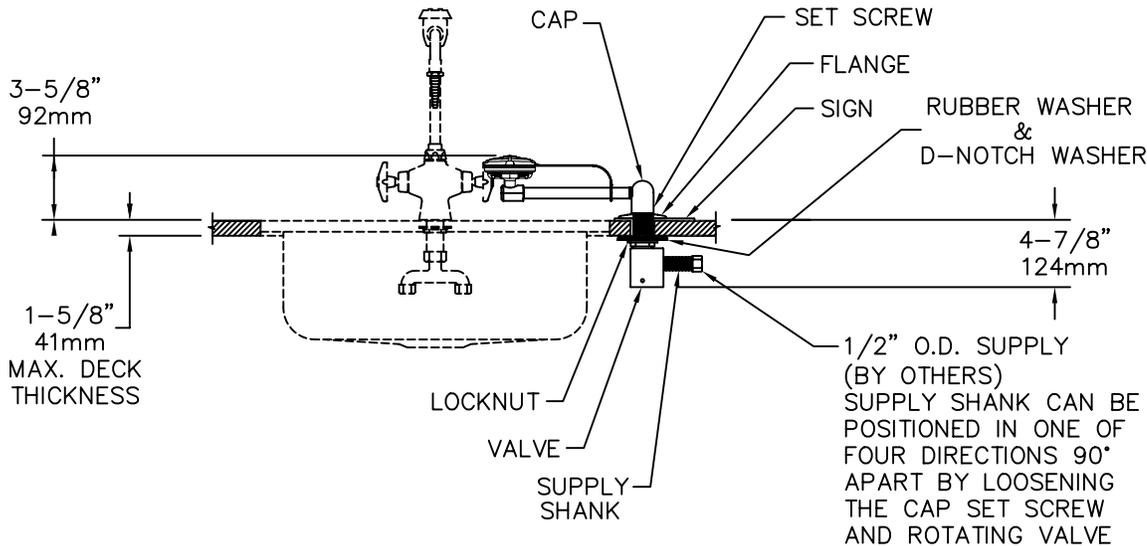



1/2" O.D. SUPPLY (BY OTHERS)
SUPPLY SHANK CAN BE POSITIONED IN ONE OF FOUR DIRECTIONS 90° APART BY LOOSENING THE CAP SET SCREW AND ROTATING VALVE

NOTES:


1. THE ANSI Z358.1-2009 STANDARD SPECIFIES EYEWASH NOZZLE HEIGHTS TO BE 83.8cm (33 IN.) TO 114.3cm (45 IN.) ABOVE THE FLOOR AND 15.2cm (6 IN.) MINIMUM FROM WALL OR NEAREST OBSTRUCTION.
2. INSTALL SO THAT EYEWASH HEAD IS OVER SINK WHEN ACTIVATED.
3. DRILL ONE ϕ 1-3/8" [35mm] HOLE WHERE UNIT IS TO BE INSTALLED.
4. THESE DIMENSIONS MAY VARY \pm 1/2" [6.4mm].

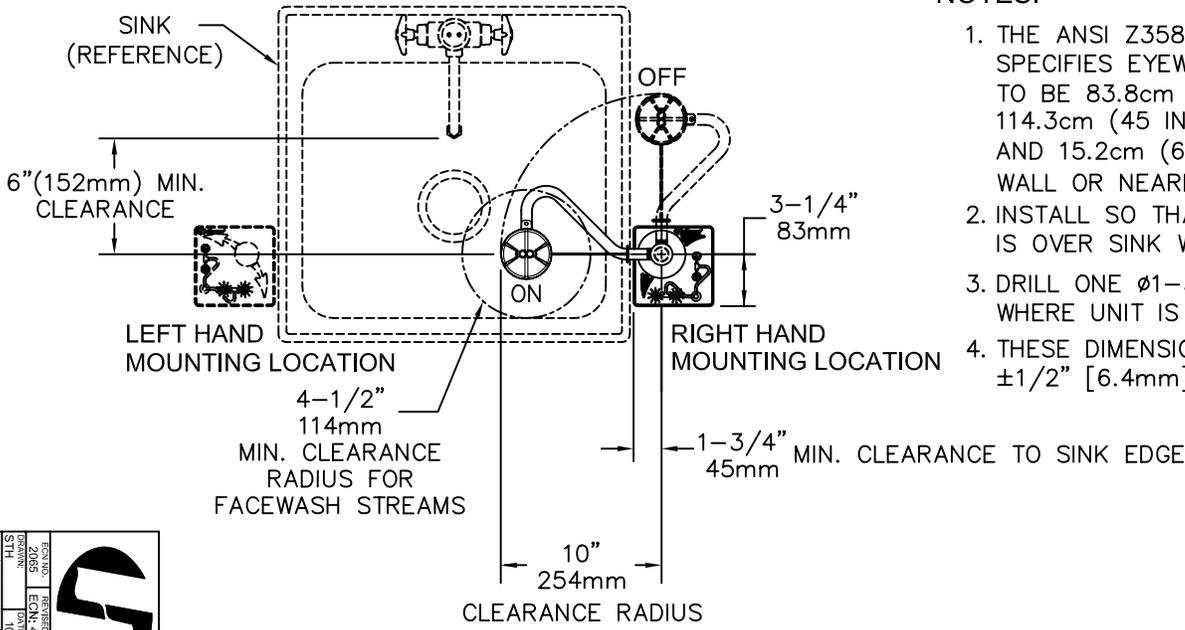

LEFT HAND APPLICATION

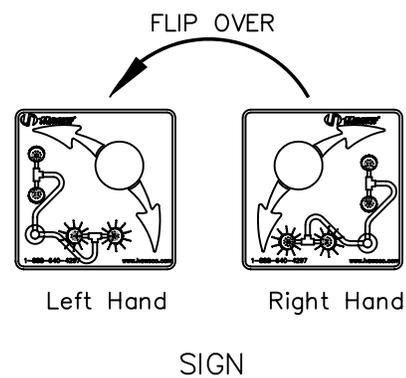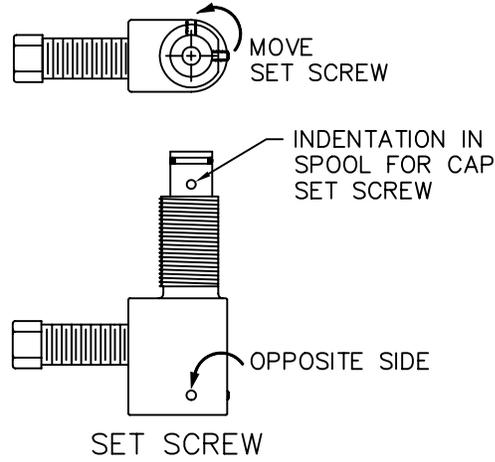

	<p>1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSCO.COM WEBSITE: WWW.HAWSCO.COM</p>
<p>FORM NO. 0000063 D REV. 12/01/00 PAGE 1 OF 2</p>	<p>DATE: 10/98 DRAWN: 2006 CHECKED: 10/98 APPROVED: 10/98</p>
<p>MODEL(S): 7611 DECK MTD SWING AWAY EM</p>	<p>DATE: 10/98 REV: 10/98 REV: 10/98 REV: 10/98</p>
<p>INFORMATION: 7611 DECK MTD SWING AWAY EM</p>	<p>DATE: 10/98 REV: 10/98 REV: 10/98 REV: 10/98</p>

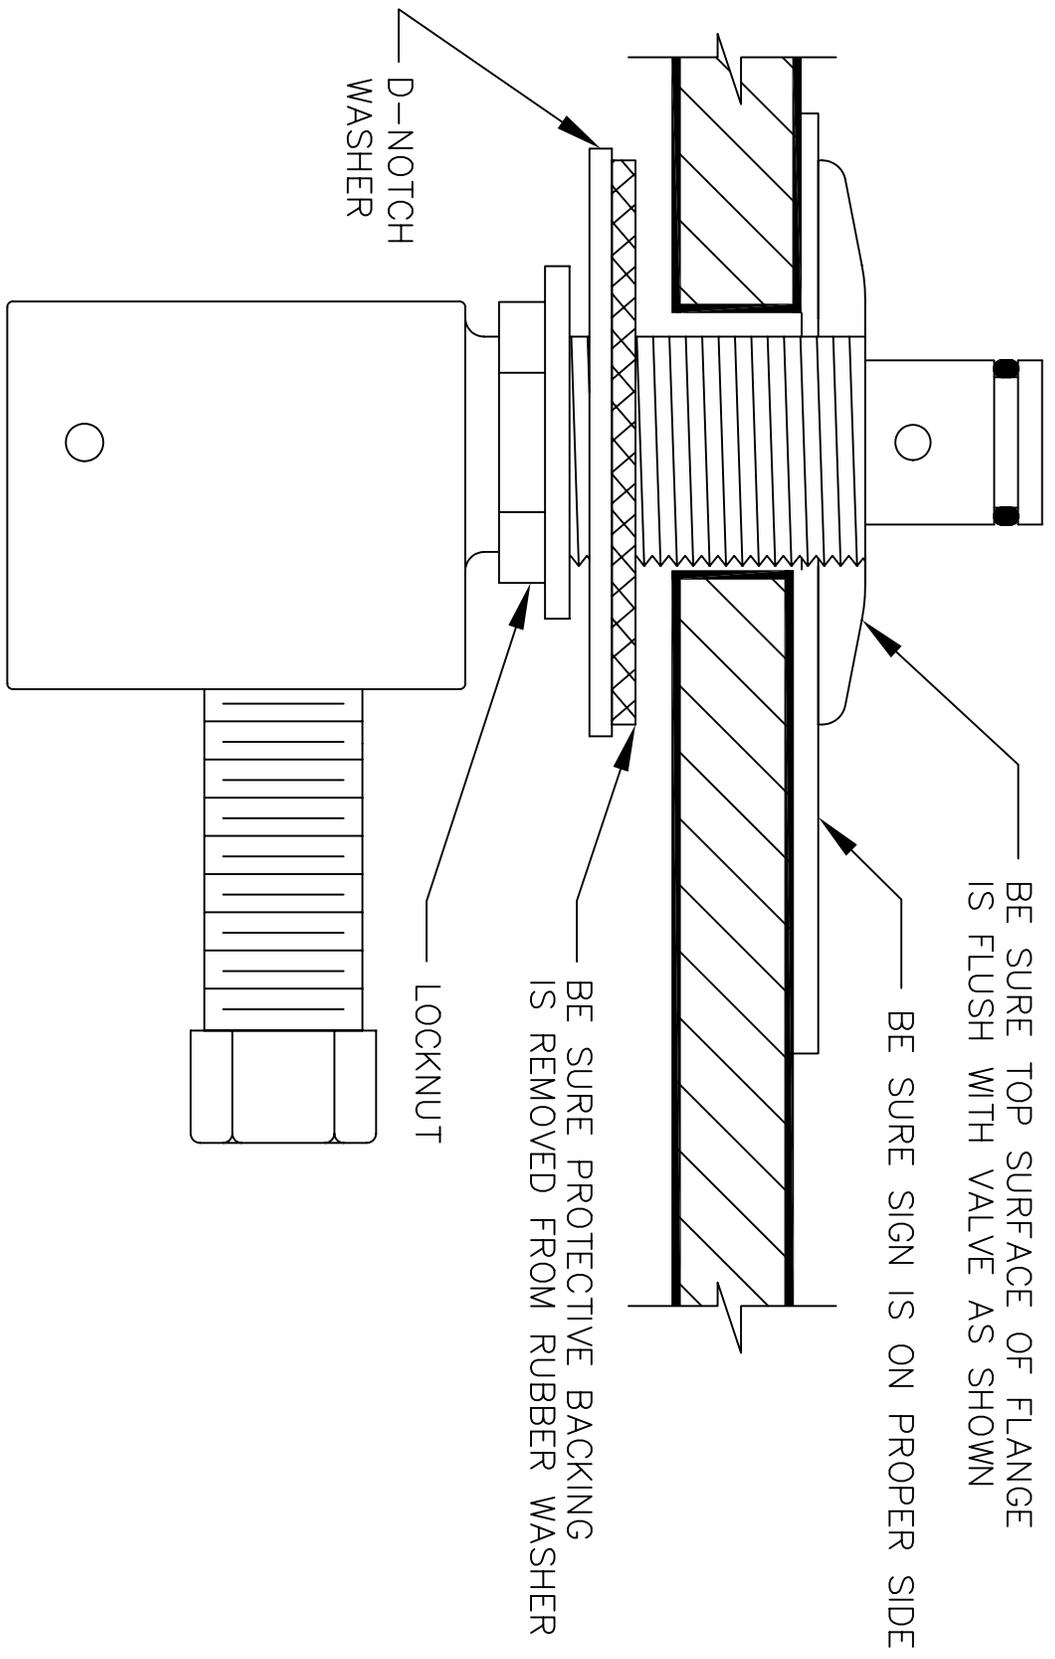

©2009 Haws Corporation - All Rights Reserved HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
REVISED DATE	ENGINEER	MODEL(S)	PART NUMBER
7/10/98	STH	7611 DECK MTD SWING AWAY E/W	0002080063.D
DATE	APPROVED	INFO FAX DOC#	SIZE
10/98	STH	27611	A
DRAWING STYLE: INSTALLATION/BACK		SHEET 2 OF 2	