

3AA HAZ-LO® HEADLIGHT - DIVISION 1
ALKALINE BATTERY-POWERED HEADLAMP

MARKET
APPLICATIONS: Industrial Safety, Public Works & Utilities, Law Enforcement, Hardware/Tool, Automotive, Marine, Sporting Goods, and Consumer.

DESCRIPTION: The 3AA Haz-Lo® is a compact, long running, high performance LED headlight. This headlight has been engineered to meet the stringent requirements of Division 1 hazardous locations, while maintaining exceptional light output and run time. The headlight is packaged with an elastic head strap and a rubber hard hat strap.

CASE MATERIAL: Impact resistant engineering resin case offering exceptional durability and weather resistance. All openings are O-ring sealed. Available in yellow.

DIMENSIONS: Face cap diameter: 1.88 in. (4.76 cm)
 Maximum headlight width 2.50 in. (6.35 cm)
 Maximum headlight length 3.08 in. (7.82 cm)


WEIGHT: 7.1 oz (202 grams) with batteries and head strap (batteries included with purchase).

LENS: Unbreakable polycarbonate lens.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.


LIGHT OUTPUT: 120 Lumens measured system output, 6,800 candela peak beam intensity, and 165 meter beam distance.

ON/OFF: Push button switch - on/off operation.
 Rubber dome actuator provides easy operation even when wearing heavy gloves.


RUN TIME:  11 hours. All runtime claims are to 10% of initial lumen output.

BATTERY: Three (3) "AA" size alkaline batteries.

FEATURES: C4® LED technology for extreme brightness.
 Impact resistant housing - 1 meter drop test verified.
 Parabolic reflector produces long range brilliance and smooth uniform beam pattern.
 Package includes both elastic head strap and rubber hard hat strap.

APPROVALS*:  UL Classified Class 1, Division 1, Groups A,B,C,D;
 Class II, Division 1, Groups E,F,G; Class III, Temperature Code: T4

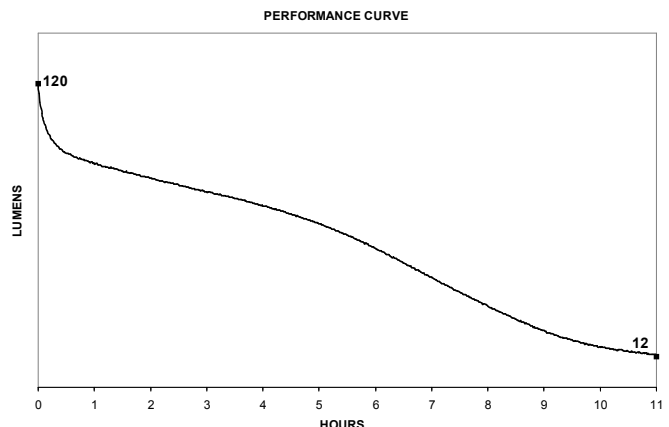
 Meets applicable European Community Directives.

 ATEX: II 1G Ex ia IIC T3 Ga - FTZU 11 ATEX 0052X

 Permissible Portable Headlight Assembly; Approval No. 20-A070001-0
 Tested for use in Methane-air mixtures only.

 Ex ia IIC T3 Ga; UL-BR 12.0403X

WARRANTY: Streamlight's Limited Lifetime Warranty

OPTIONAL ACCESSORIES: N/A


* See product for specific ratings.

All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 11/03/2006

Revised: 02/05/2013 Rev: 6

Assembled In the USA

Document #161